




PRECISION GRINDING ON FLEXIBLE CONTINUOUS NON-METALLIC MATERIALS

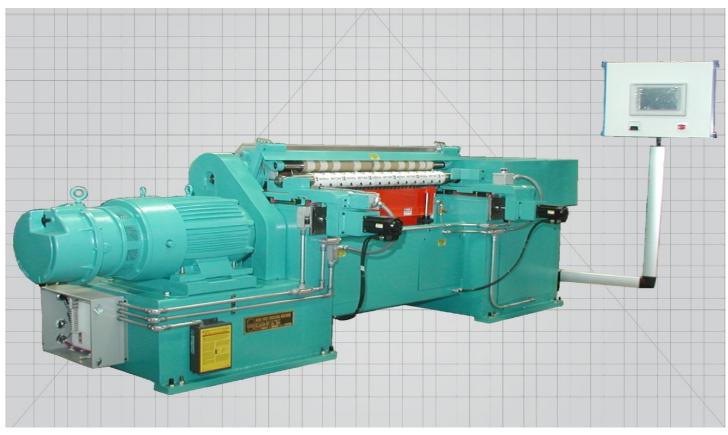

AVAILABLE IN WIDTHS UP TO 52 INCHES

CURTIN-HEBERT MACHINES


11 Forest StreetP.O. Box 511Gloversville, New York 12078-0511PH 518-725-7157FAX 518-773-3805


EMAIL: www.info@curtinhebert.com

PRODUCTIVE ACCURACY



The heart of the machine is a dynamically balanced cylinder to which industrial coated abrasive is applied. The cylinder is drilled for water circulation to help diffuse friction heat, preventing distortion of the .0005" concentricity.

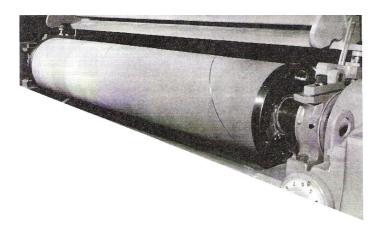

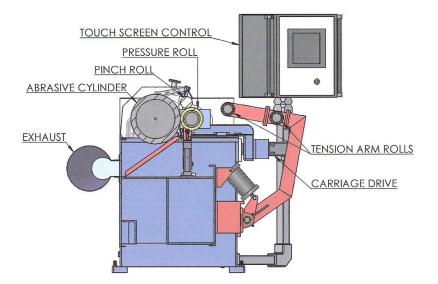

Demonstration equipment available at our Gloversville Plant. Send or bring us your samples or finishing problems.